


SILICONE NEON STRIP

USER MANUAL V1.0

For more product information, please contact our salesman.
Technical parameters are subject to change without notice in case of product iteration or updates.

1 Precautions before installation


① Recommended for indoor use




② No pedaling



③ No distortion



④ No stretching




2 Silicone Neon Strip Bending Radius & Note




Top Bending

① Bending Direction & Min. radius




Note:
1. Due to the different types and attributes of neon lights, please refer to the line marks for the bending radius

② Side bending prohibited




Side Bending

① Bending Direction & Min. radius




Note:
1. Due to the different types and attributes of neon lights, please refer to the line marks for the bending radius

② Top bending prohibited




3 Profile installation


① Install with included countersunk screws only; do not use other types or incorrect sizes.

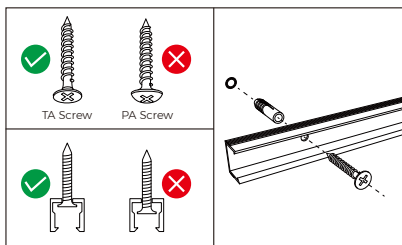

② Install neon light strip in the correct position.

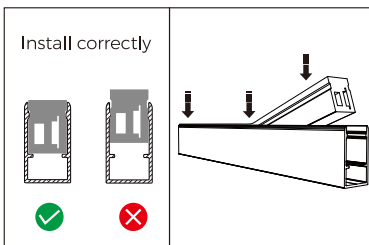


③ Align profile ends when joining; do not install misaligned.

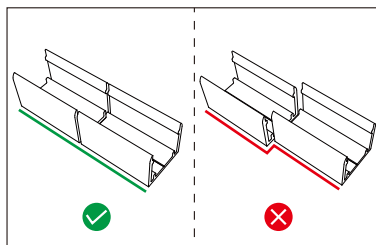

4 Wiring Diagram


! Turn off the power before wiring !




! Notes

- These products are subject to thermal expansion due to temperature changes. Thermal expansion must be taken into consideration for installation in environment with wide temperature change.
- Use water and methylated alcohol to clean the surface.
- The product reaches IP65 protection. Please use wiring system with a protection level equal to or higher than IP65.
- The product is not suitable for swimming pools and fountains.


① Non-dimming connection mode




② Dimming connection mode

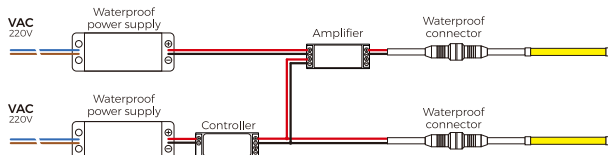

Cutting Diagram

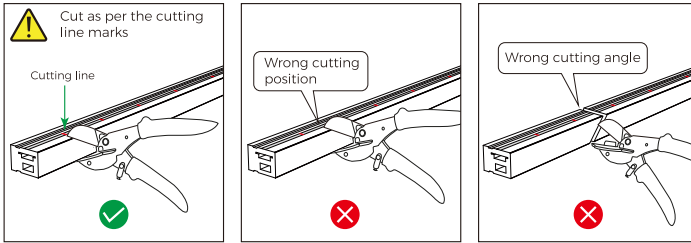

Cutting / Welding / End cap installation guide

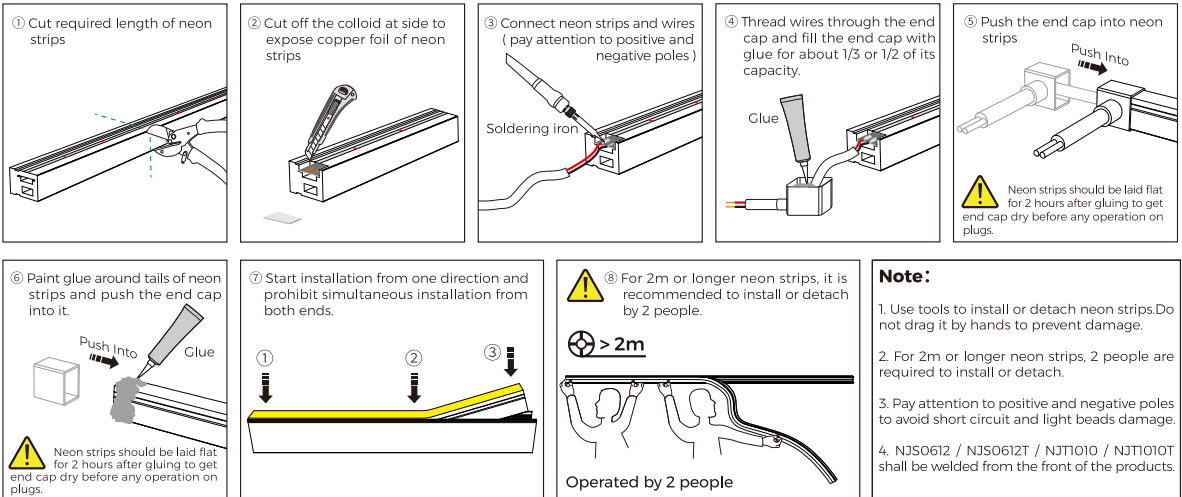

Precautions and product warranty notes

Precautions:

1. Cut as per cutting line marks for required length of neon strips.
2. Use DC isolated power supply of less than 5% ripple waves to drive neon strips and do not use RC buck or non-isolated power supply.
3. When connecting neon strips in series, light-up test should be made soon after each connection to promptly find out whether the positive and negative poles are correctly connected.
4. Pay attention to positive and negative poles connection. Make sure the power supply conforms to required voltage to avoid damage.
5. Align profile ends when joining; do not install misaligned.
6. Silicone neon strips shall be stored in a dry and sealed environment for no more than 1 year at best. (For detailed information on the operating temperature, storage temperature, and other specifications of specific models, please refer to the product specifications.)
7. Neon strips have unilateral conductivity. If a power cable with a DC/AC converter is used, power-on tests shall be done first after connecting power supply to ensure that the positive and negative poles are connected correctly.
8. In actual applications, 20% of the power supply shall be kept (recommended to use no more than 80% of the power) to guarantee that sufficient voltage is available to drive the product.
9. Attention shall be paid to safe operation. After powering on, it is not allowed to touch the AC power supply to avoid an electric shock.
10. To ensure the duration and reliability of neon strips, be sure to bend it in the specified direction and radius range. For details, please refer to the indicating marks.
11. Please confirm before usage since products of varied sizes may show slight differences in their color under same color temperature due to their structural differences.
12. Due to the characteristics of the silicone material, it is normal for the color of the colloid to change slightly after the neon product is used for a long time.
13. During construction and installation, it is strictly prohibited to use adhesives such as 502 / 705 that are prone to chemical reactions with silicone. Silicone sealant is recommended for bonding.
14. For long-term storage and leftover products after cutting and use, proper sealing measures must be taken to avoid exposure to organic environments such as aldehydes and benzenes.
15. During product installation and application, it is recommended to keep the entire product under the same ambient exposure conditions, so as to prevent inconsistent color discoloration of the product colloid caused by different exposure levels and environmental differences.

Product warranty notes:

1. For specific warranty periods, please refer to the product specifications. If any issues arise during this period and are confirmed to be quality-related through inspection by our service provider, a replacement of the same model will be provided free of charge.
2. The warranty does not cover any of the following:
 - (1) Any product damage due to usage not allowed in the instructions;
 - (2) Any product damage due to disassembling or wrong operations by the user;
 - (3) Severe appearance damage or deformation of the product.

Please read the manual carefully before installation and application, and use the product in the correct way.
Instructions on accessories are included in the manual.
Please properly reserve the manual after reading for future reference.